




GF-8000 Core

- Sprayable Core
- Sprayable Paste

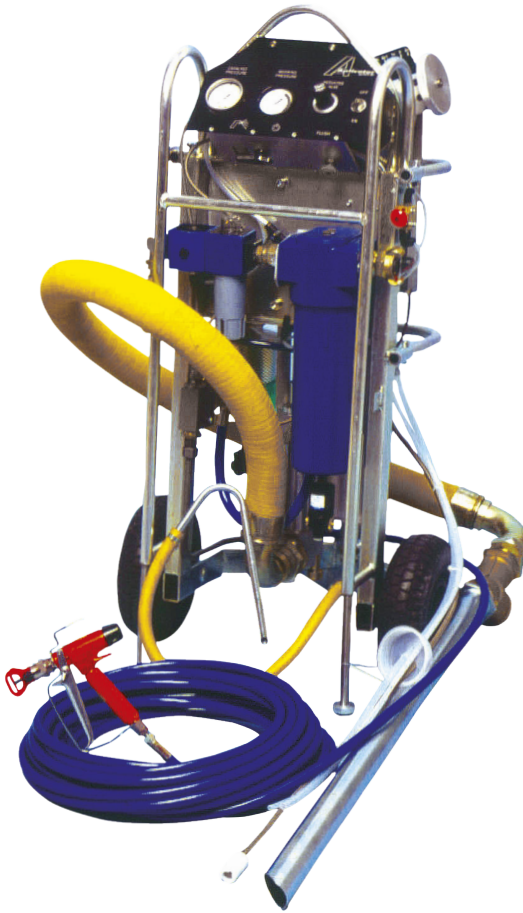

Please note! The machine on the picture is equipped with a suction hose for a different type of resin system.

GF-8000 Core is in the first place intended for high viscosity resins filled with glass-flakes or other abrasive fillers. The machine can also be used for other 1- or 2-component resins such as paints, epoxy

etc. GF-8000 Core is robust, easy to handle and constructed to withstand hard work during long working days. All regulators and meters are concentrated on one panel for simple adjustment.

GF-8000 Core

– Sprayable Core

– Sprayable Paste

OPERATION

Aplicator's GF-8000 Core machine works with an air driven dual-acting piston pump, both for the resin and the catalyst. Manufactured from stainless steel, the catalyst pump incorporates a pressure gauge and pressure relief valve and is synchronised with the resin pump shaft for precise delivery of catalyst. Consequently, it is independent of variations in air supply or material viscosity.

Catalyst volumes are easily adjusted with a hand wheel, which changes the stroke length of the catalyst pump. The mixing ratios are continuously variable between 0.8 - 2.5 %. Catalyst is pumped directly from the original container. Resin is usually pumped from a 200-litre drum, but can also be pumped from a 25-litre pail, a bulk container or a fixed storage tank.

Using a static mixer, catalyst and resin are thoroughly blended together before the material is pumped through a single hose to the gun.

FLUSHING

Cleaning the spray gun after use is easily carried out by the built-in pneumatic operated flushing pump. By pressing the flushing button on the pump, the static mixer, hose, handle and spray gun will automatically be flushed with no manual handling of hazardous solvents.

SPECIAL FEATURES

- Catalyst slave pump for exact catalyst: resin ratio
- Continuously variable catalyst ratio
- Recirculation of catalyst
- Pneumatically solvent pump
- Transportable chassis
- Two wheeled trolley for full mobility
- Static mixer
- Easy to operate
- Adjustable nozzle
- Additional feeding pump for base material

The machine showed on the overleaf might have extra equipment, modifications might have been made since the brochures were printed.

OPTIONS

- Volume meter
- Flow meter
- Catalyst pressure guard
- Catalyst slave pump
For mixing ratio between 0.8–8 %
- Catalyst slave pump
For mixing ratio between 10–25 %
- Catalyst slave pump
For mixing ratio between 20–48 %

TECHNICAL DATA

Air supply:	6 Bar (90 psi)
Air consumption:	120 litres / litre output
Capacity:	Depending on relationship between pressure, viscosity, hose length and nozzle orifice
Max. working pressure:	200 Bar (3000 psi)
Pressure ratio:	36:1
Viscosity:	The nozzle orifice, pressure must harmonise with the viscosity and thixotropy of the material used
Mixing ratio:	Continuously variable between 0.8 and 2.5 %
Hose length:	Standard length 10 m
Total weight:	Approx. 93 kg



APLICATOR SYSTEM AB

Metallvägen 3
SE-43533 Mölnlycke, Sweden
Telephone: +46 317 50 30 00
Fax: +46 317 50 30 01
www.aplicator.se
info@aplicator.se

Branch offices: Aplicator System AB

Denmark info@aplicator.dk
Finland info@aplicator.fi
Spain info@aplicator.es
U.K info@aplicator.co.uk