


# GF-8000

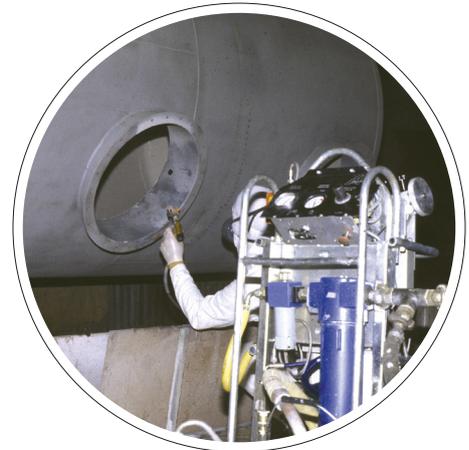

GF-8000 is in the first place intended for high viscosity resins filled with glass-flakes or other abrasive fillers. The machine can also be used for other 1- or 2-component resins such as paints, epoxy etc.

GF-8000 is robust, easy to handle and constructed to withstand hard work during long working days. All regulators and meters are concentrated on one panel for simple adjustment.

# GF-8000

## OPERATION

**Aplicator's GF-8000** machine works with an air driven dual-acting piston pump, both for the resin and the catalyst. Manufactured from stainless steel, the catalyst pump incorporates a pressure gauge and pressure relief valve and is synchronised with the resin pump shaft for precise delivery of catalyst. Consequently, it is independent of variations in air supply or material viscosity.

Catalyst volumes are easily adjusted with a hand wheel, which changes the stroke length of the catalyst pump. The mixing ratios are continuously variable between 0.8 - 2.5 %. Catalyst is pumped directly from the original container. Resin is usually pumped from a 200-litre drum, but can also be pumped from a 25-litre pail, a bulk container or a fixed storage tank.

Using a static mixer, catalyst and resin are thoroughly blended together before the material is pumped through a single hose to the gun.

## FLUSHING

Cleaning the spray gun after use is easily carried out by the built-in pneumatic operated flushing pump. By pressing the flushing button on the pump, the static mixer, hose, handle and spray gun will automatically be flushed with no manual handling of hazardous solvents.

## SPECIAL FEATURES

- Catalyst slave pump for exact catalyst: resin ratio
- Continuously variable catalyst ratio
- Recirculation of catalyst
- Fits into a 24" manhole
- Pneumatically solvent pump
- Transportable chassis
- Crash bars for protection during transport
- Two wheeled trolley for full mobility
- Static mixer
- Easy to operate

*The machine showed on the overleaf might have extra equipment, modifications might have been made since the brochures were printed.*

## OPTIONS

- Volume meter
- Flow meter
- Catalyst pressure guard
- Catalyst slave pump  
*For mixing ratio between 0.8–8 %*
- Catalyst slave pump  
*For mixing ratio between 10–25 %*
- Catalyst slave pump  
*For mixing ratio between 20–48 %*

## TECHNICAL DATA

<b>Air supply:</b>	6 Bar (90 psi)
<b>Air consumption:</b>	120 litres / litre output
<b>Capacity:</b>	Depending on relationship between pressure, viscosity, hose length and nozzle orifice
<b>Max. working pressure:</b>	200 Bar (3000 psi)
<b>Pressure ratio:</b>	36:1
<b>Viscosity:</b>	The nozzle orifice, pressure must harmonise with the viscosity and thixotropy of the material used
<b>Mixing ratio:</b>	Continuously variable between 0.8 and 2.5 %
<b>Hose length:</b>	Standard length 10 m
<b>Total weight:</b>	Approx. 93 kg